



MBS/YJ SERIES


**SINGLE PHASE 0.5 AMPS.
GLASS PASSIVATED BRIDGE
RECTIFIERS**

**Voltage Range
200 to 1000 Volts
Current
0.5 Amperes**

Features

- Ideal for printed circuit board
Reliable low cost construction utilizing
molded plastic technique
- High surge current capability
- High temperature soldering guaranteed:
260°C / 10 seconds at 5 lbs., (2.3kg)
tension
- Small size, simple installation
- Leads solderable per MIL-STD-202
Method 208

MBS

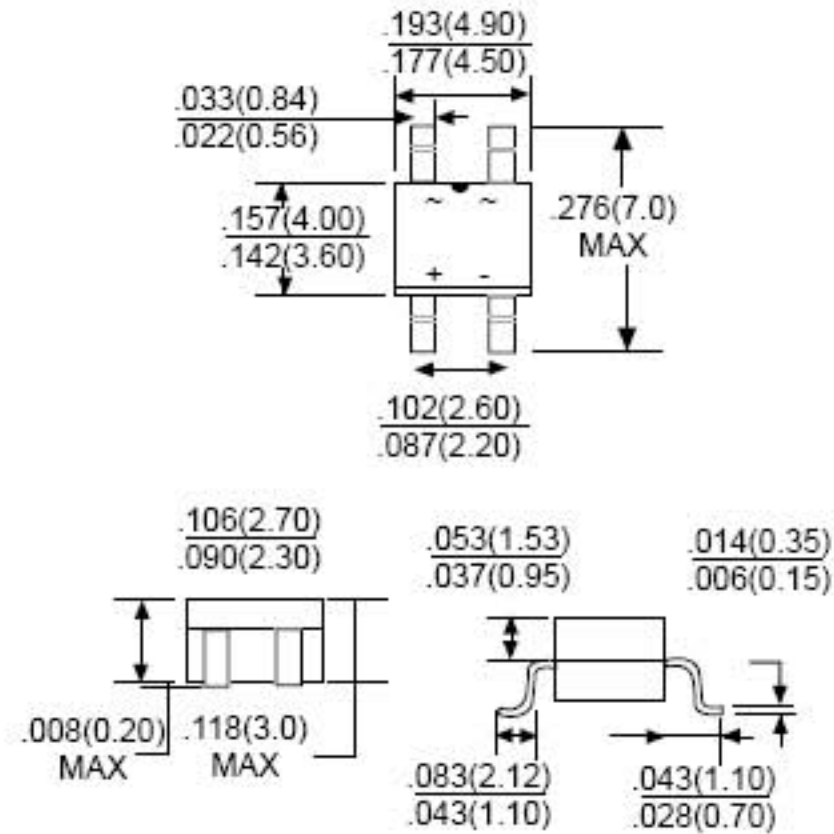

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%

| Type Number | | MB2S | MB4S | MB6S | MB8S | MB10S | UNITS |
|---|--------------------|--------------------|------|------|------|-------|----------|
| | | YJ2J | YJ4J | YJ5J | YJ6J | YJ7J | |
| Maximum Repetitive Peak Reverse Voltage | V _{RRM} | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum RMS Voltage | V _{RMS} | 140 | 280 | 420 | 560 | 700 | V |
| Maximum DC Blocking Voltage | V _{DC} | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum Average Forward Rectified Current On glass-epoxy P.C.B. On aluminum substrate | I _{F(AV)} | 0.5 (1) 0.8 (2) | | | | | A |
| Peak Forward Surge Current, 8.3 ms Single Half Sinewave Superimposed on Rated Load (JEDEC method) | I _{FSM} | 35 | | | | | A |
| Maximum Instantaneous Forward Voltage Drop Per Leg@0.4A | V _F | 1.0 | | | | | V |
| Maximum DC Reverse Current at Rated DC Blocking Voltage T _A = 25°C T _A = 100°C | I _R | 5.0 100 | | | | | μA μA |
| Typical Junction Capacitance Per Leg (Note3) | C _J | 15 | | | | | pF |
| Typical Thermal Resistance Per Leg | R _{JA} | 75 | | | | | °C/W |
| Operating Temperature Range | T _J | -55 to +150 | | | | | °C |
| Storage Temperature Range | T _{STG} | -55 to +150 | | | | | °C |

Note: 1. On glass epoxy P.C.B mounted on 0.05x 0.05" (1.3x1.3mm) pads
2. On aluminum substrate P.C.B with on area of 0.8"x 0.8" (20x20mm) mounted on
0.05x 0.05" (1.3x1.3mm) solder pad
3. Measured at 1.0MHz and applied reverse voltage of 4.0 volts.

RATING AND CHARACTERISTIC CURVES

MBS/YJ SERIES (TA=25°C unless otherwise noted)

